



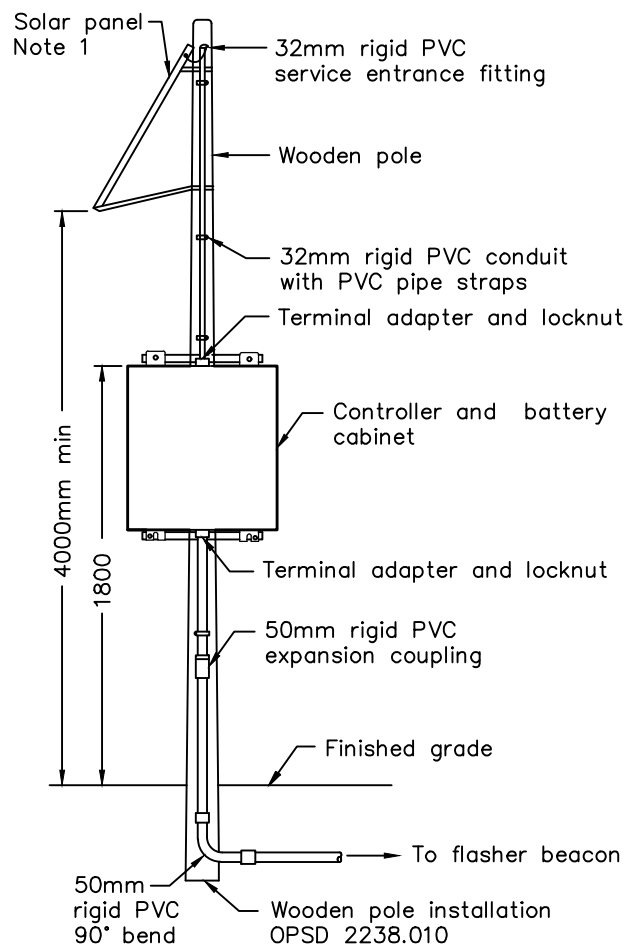

SOLAR POWER ASSEMBLY

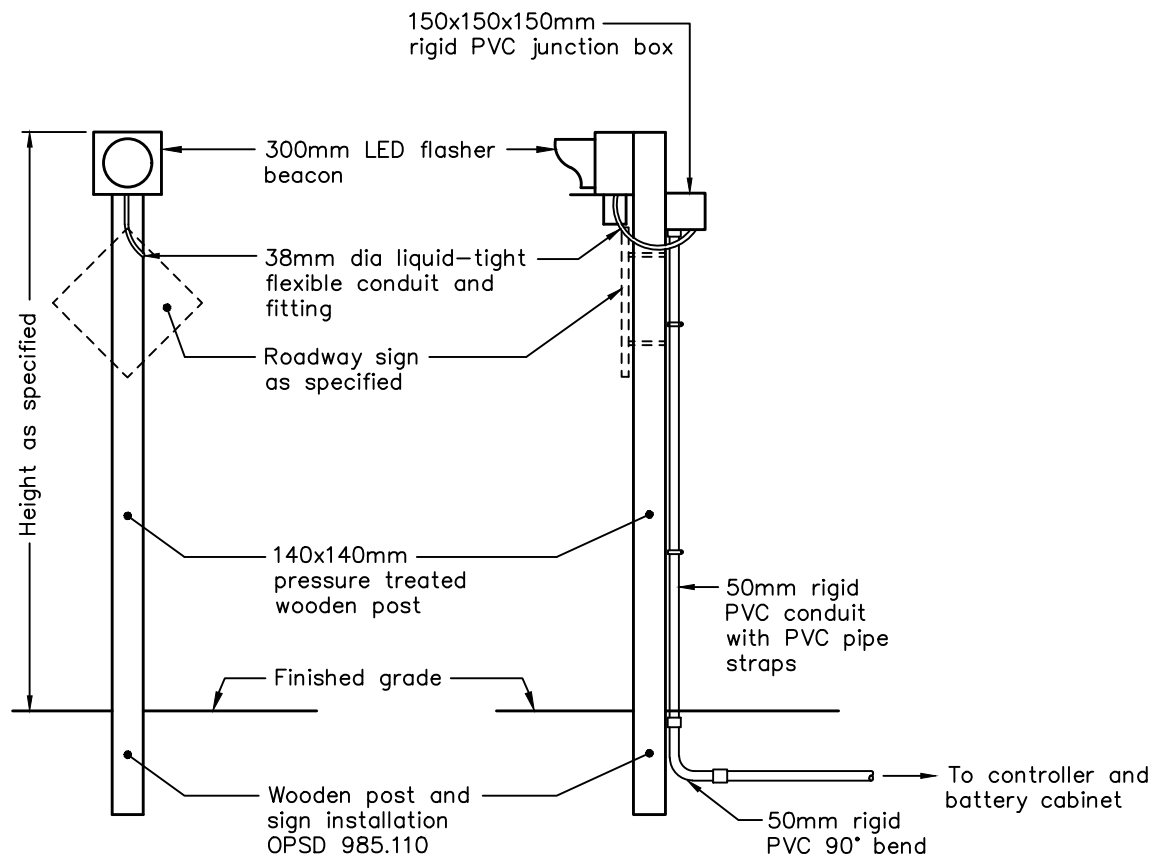

FRONT VIEW

SIDE VIEW

NOTES:

1 The solar panel and equipment shall be installed and oriented according to manufacturer's recommendations and as specified.

A LED flasher beacons shall be extra low-voltage.

B All field cuts, threads, and holes shall be deburred and coated with zinc rich paint.

C All dimensions are in millimetres unless otherwise shown.

ONTARIO PROVINCIAL STANDARD DRAWING

Nov 2021

Rev 1

**SOLAR POWERED LED FLASHER BEACON
FOR ROADWAY SIGN DIRECT BURIED POLE**



OPSD 2536.032