




SECTION 2

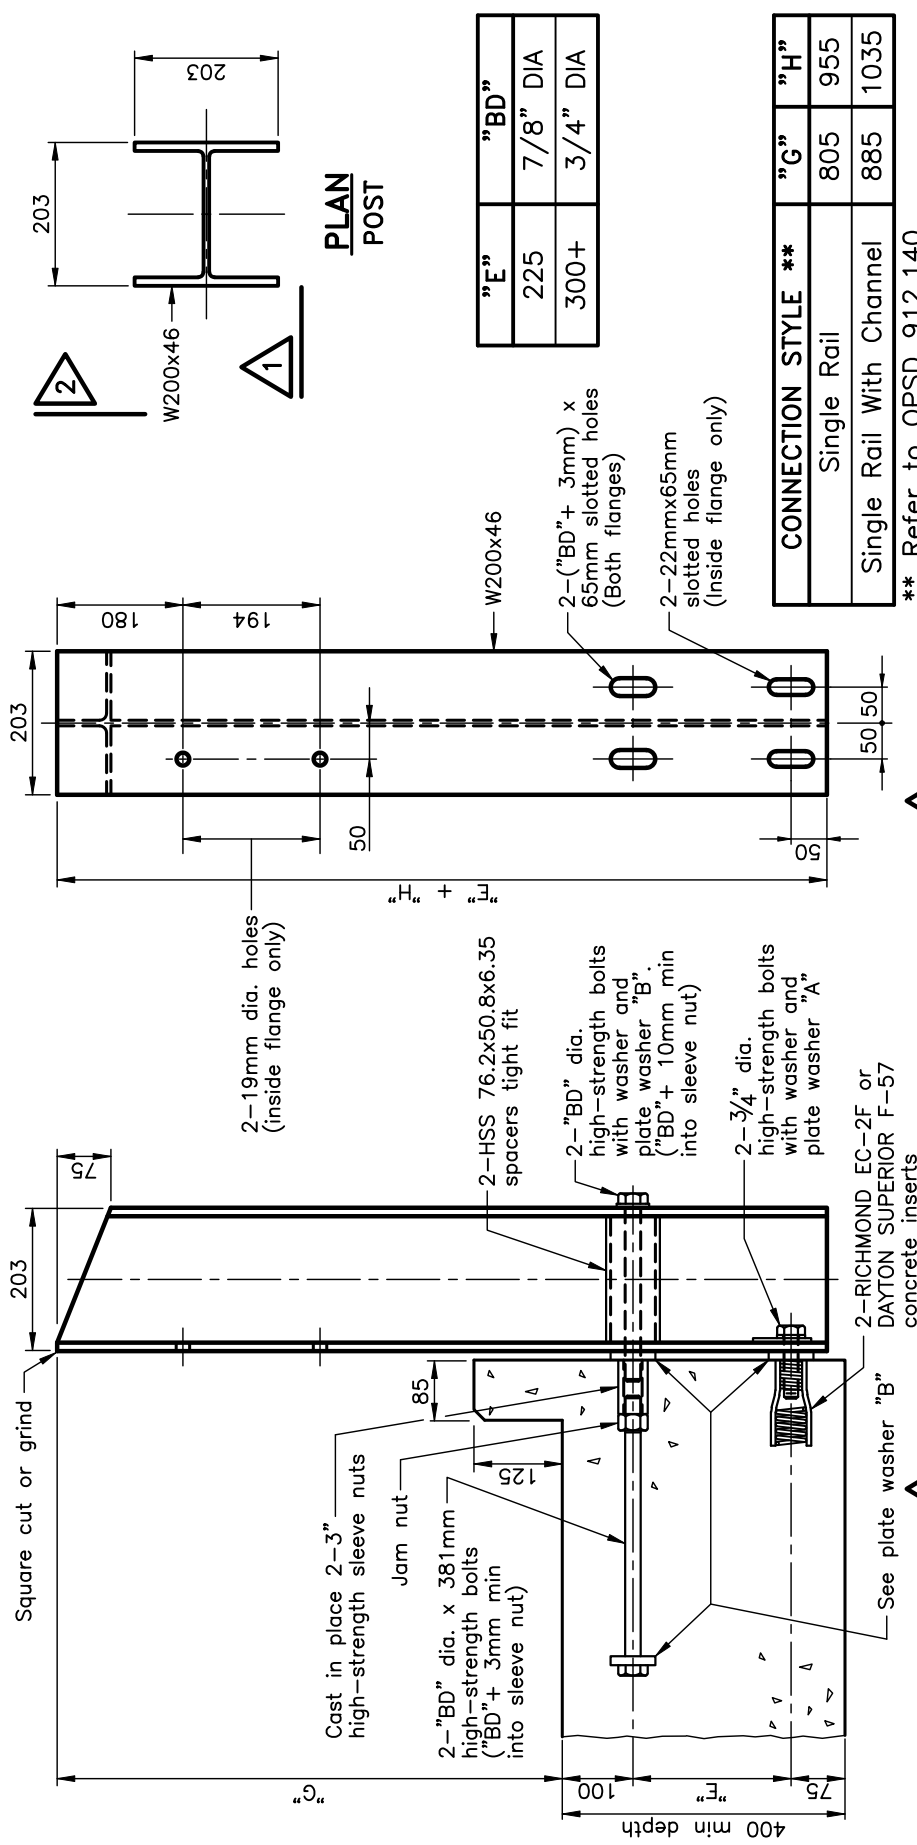

SECTION 1

NOTES:

- This Standard to be read in conjunction with SS10-42A and SS10-20.
 - W200x46 shall be Grade 350W.
 - Steel plate shall be Grade 300W.
 - Anchor bolts shall conform to ASTM Specification A325. They shall be fitted with matching sleeve nuts, heavy hex nuts, and washers.
 - Turn upper high-strength post bolts 2/3-turn past snug-tight condition.
 - Tighten lower high-strength post bolts 1/3-turn past snug condition.
- G. The anchorage assembly, (including bolts, nuts, sleeve nut, inserts, and washers), and posts, shall be hot-dip galvanized.
- H. All dimensions are in millimetres or metres unless otherwise shown.

THREE BEAM GUIDE RAIL - SIDE MOUNT POST AND ATTACHMENT DETAILS PERFORMANCE LEVEL 1

Date July 2014 Rev

SS10-42B