




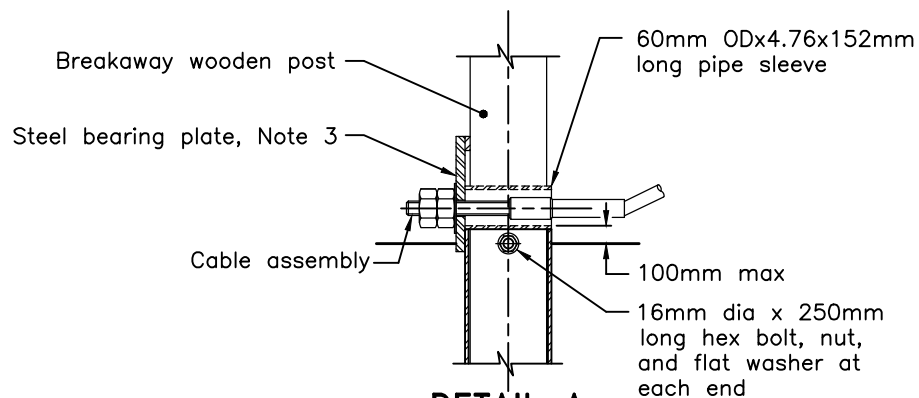


DETAIL A
(STRUTS NOT SHOWN FOR CLARITY)

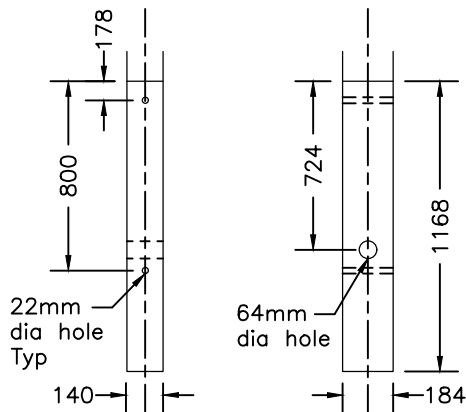


FRONT VIEW SIDE VIEW
BREAKAWAY WOODEN POST

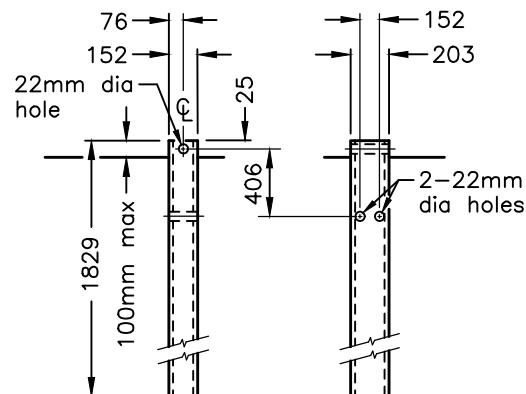

FRONT VIEW SIDE VIEW
POST ANCHOR TUBE
HSS 203.2x152.4x4.78
1829mm long

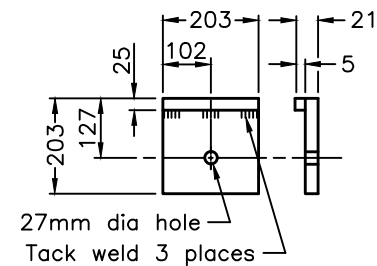

STEEL BEARING PLATE DETAIL

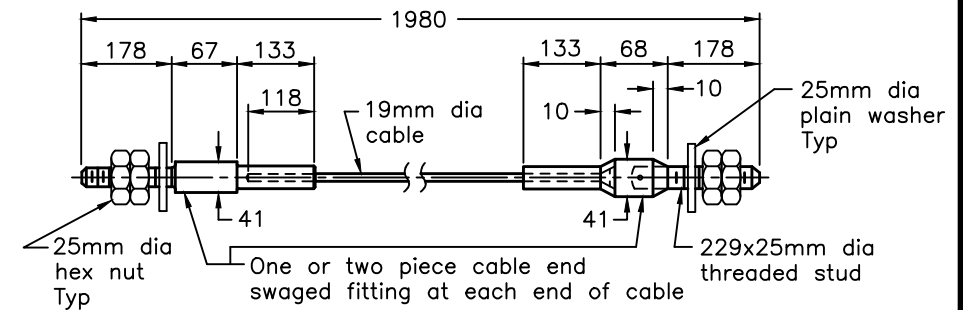


ONE PIECE CABLE END TWO PIECE CABLE END

CABLE ASSEMBLY

Wz-2 oversize
250x250mm
Note 2

Reflective white
Reflective green

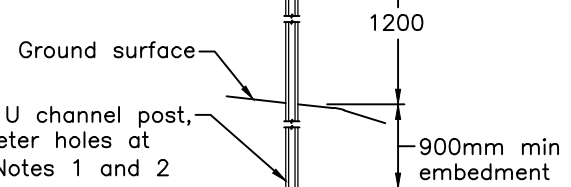

SNOW PLOW MARKER AND POST

NOTES:

- 1 Minimum weight of post shall be 4.46 kg/m.
- 2 Post and mounting hardware shall be hot dip galvanized after fabrication according to ASTM A123.
- 3 Steel bearing plate shall be secured against rotation using nails into post.

- A All dimensions subject to manufacturing tolerances unless otherwise shown.
- B All dimensions are in millimetres unless otherwise shown.

ONTARIO PROVINCIAL STANDARD DRAWING

**GUIDE RAIL SYSTEM, STEEL BEAM
TYPE M20 AND M30 LEAVING END
TREATMENT POST COMPONENTS**

Apr 2024

Rev 1



OPSD 912.257